

Ricoh Interactive Whiteboard

## A6500 Datasheet

✔ Interactive learning   ✔ Remote collaboration   ✔  
Webinars   ✔ Hybrid meetings



## Everything you need to work together – without distance limitations


Hybrid working and learning has become a daily process for many people. Nowadays, people join meetings and training from multiple locations as standard and the need to collaborate remotely has never been greater. Make meetings and classes collaborative wherever they are, with the new Ricoh Interactive Whiteboards. The new A6500 is designed to make collaboration work for you.

In education remote learning and collaboration are the new normal, where hybrid classrooms must allow real-time participation and information sharing with in-person and remote attendees allowing external sources into the classroom. Our interactive whiteboards are affordable, intuitive and customizable. Teachers can now simply plug in a laptop to start lessons.

Businesses reap benefits from the easy-to-use interface and built-in Apps, that offer seamless communication and collaboration. Ideal for hybrid working, allowing multiple people to write on the same screen. Save time taking minutes and notes, you can capture annotations in real-time. Cast multiple screens wirelessly at any time and maximise collaboration.

- 65 inch : for small conference rooms and classrooms
- Easy-to-use interface and built-in Apps
- Effective split-screen presentation
- 4K UHD display embedded canvas
- Advanced connectivity

# Dimensional drawings

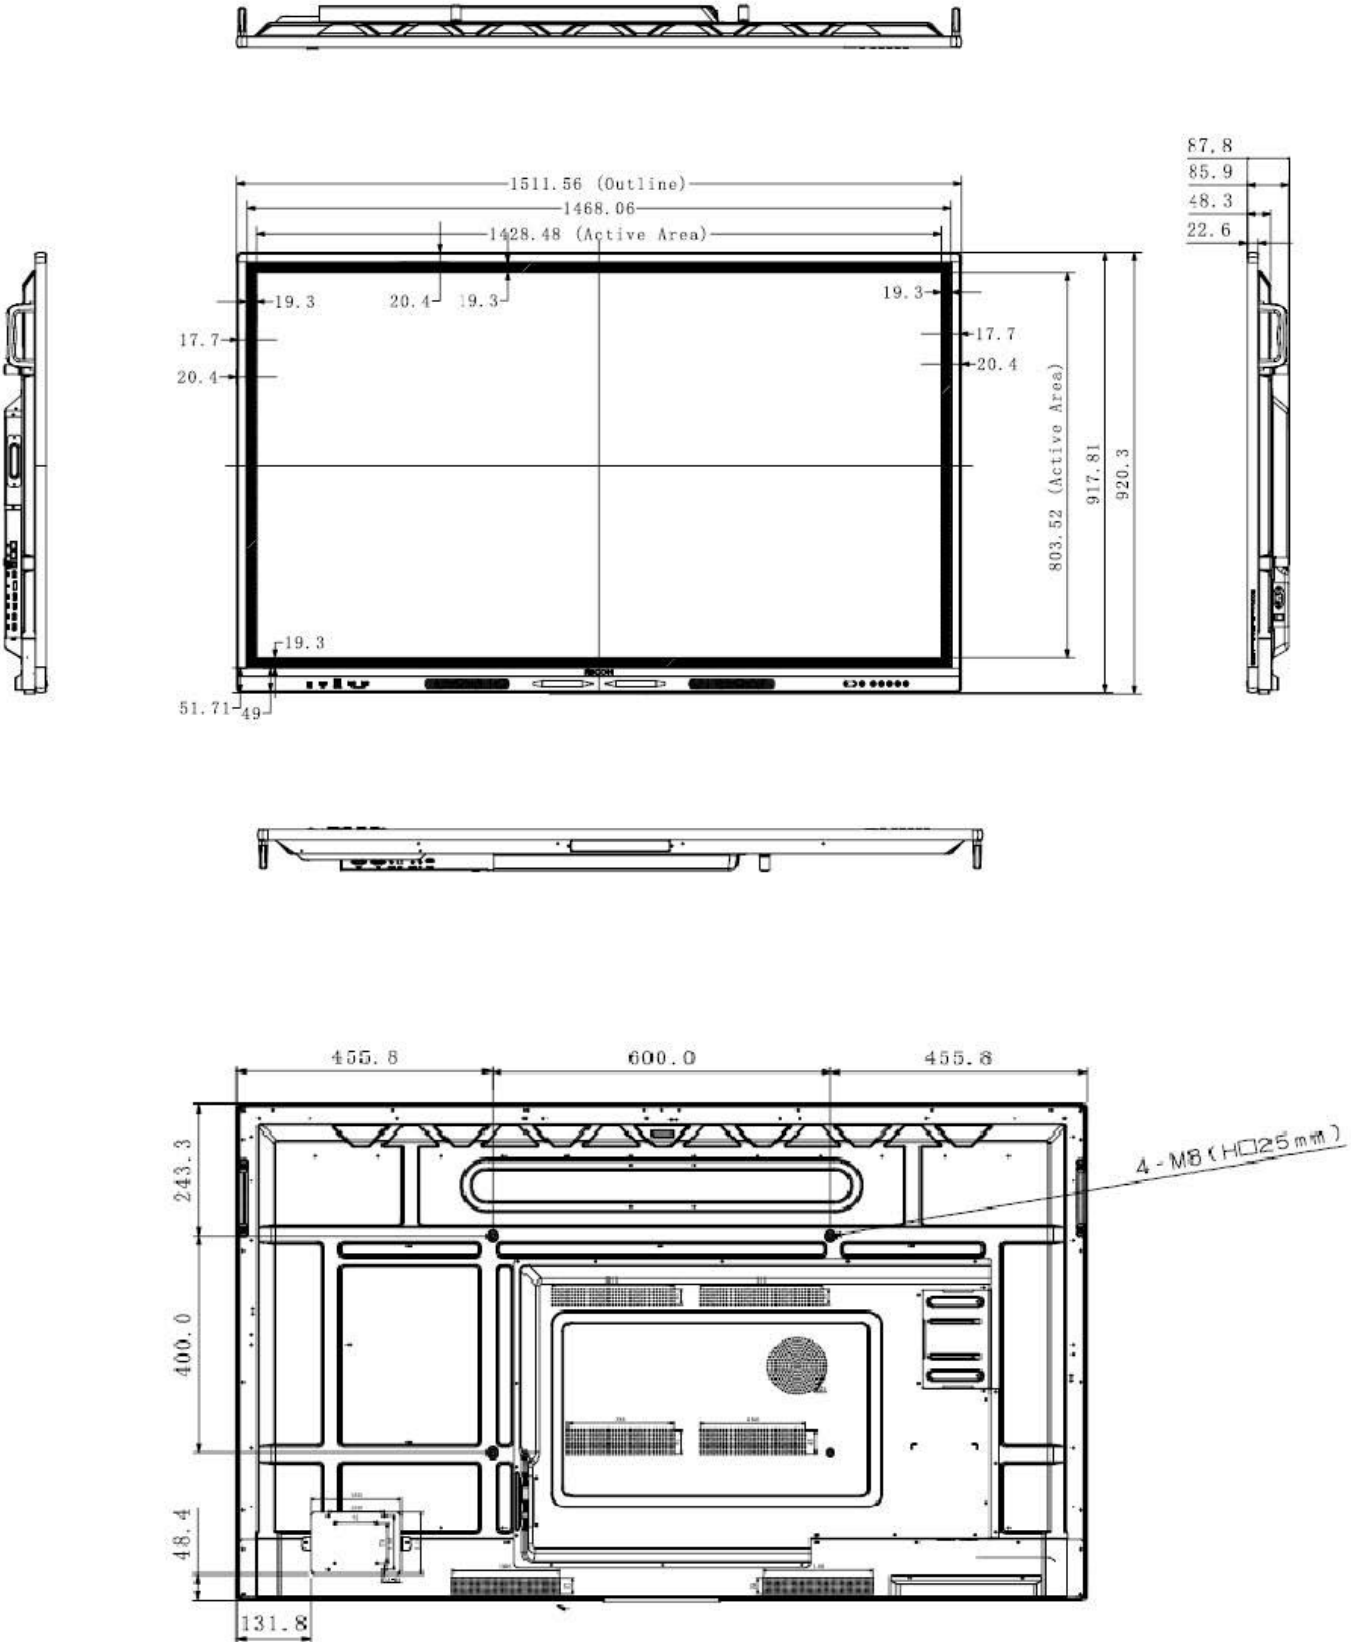

# A6500

## MAIN SPECIFICATIONS

### GENERAL

Rear interface	HDMI IN x2: Version: HDMI2.0, Up to 3840x2160@60HzHDMI1 support ARC function, HDCP 1.4/2.0/2.2 compliant DP IN x1: Version: DP1.2a, Up to 3840x2160@60Hz, HDCP 1.4/2.2 compliant VGA IN x1: Interface: DB15, Up to 1920x1080@60Hz Audio IN x1: Interface: $\Phi$ 3.5mm mini interface, input level(L/R): 0.2-2Vrms LAN x2: 10M/100Mbps Base-T, 100Mbps Base-TX, Support internet switch, To OPS(10M/100M/1000M), To Android(10M/100M), Interface: RJ-45 USB2.0 x1: Support images, music, video file playback, only can use this USB port to upgrade, Interface: USB2.0 Type-A USB3.0 x2: Support images, music, video file playback. Upgrade are not supported, Interface: USB3.0 Type-A Touch-USB x1: Touch interface for HDMI1/HDMI2/DP/VGA, Interface: USB3.0 Type-B MIC IN x1: Can Mix the MIC input and other input source to SPK OUT, Interface: $\Phi$ 3.5mm mini interface SPDIF x1: Max speed: 16Mbps, Interface: Optical RS232-IN x1: RS232 Input, Interface: DB9 HDMI-OUT x1: Max. resolution: 3840x2160@60Hz, Version: HDMI2.0, All signals can be Loop-outed by HDMI-OUT Audio OUT x1: Output level(L/R): 10mVrms $\pm$ 40mVrms (@500mVrms 1KHz, load 32 $\Omega$ ), Interface: $\Phi$ 3.5mm mini interface (Headphone-out)
Front interface	Type-C x1: Power output: 20V/3A, Up to 3840x2160@60Hz, Interface: Type-C Public USB x2: Version: USB3.0, Interface: Type-A Touch-USB x1: Touch interface for HDMI, Interface: USB3.0 Type-B HDMI IN x1: Version: HDMI2.0, Up to 3840x2160@60Hz, HDCP 1.4/2.0/2.2 compliant
RAM	4 GB
ROM (storage)	32 GB
Dimensions: W x D x H (mm)	1,511.6 x 87.8 x 920.3
Package size: W x D x H (mm)	1,660 x 220 x 1,010
Weight (kg)	39
Package weight (kg)	54
Housing material (face frame/back shell)	Aluminium/metal plate
Housing colour (face frame/back shell)	Black/black
VESA	4-M8 screw hole 600 x 400 mm

### DISPLAY PANEL

Panel size: diagonal (" wide)	65
Effective area: W x H (mm)	803.52 x 1,428.48
Resolution: maximum (Full HD)	3,840 x 2,160
Colours: maximum	1,070,000,000
Brightness: maximum (cd/m <sup>2</sup> )	350
Contrast ratio	1,200 : 1
Pixel pitch (mm)	0.372 x 0.372
Response: grey to grey (ms)	8
Refreshing frequency	60 Hz
Viewing angle: H/V (°)	178/178
LED lifetime	50,000 hours
Colour gamut	72%

### TOUCH SYSTEM

Sensing type	Infrared touch frame
Surface protection	3.2 mm toughened glass
Infrared touch	Up to 20 points
Interpolation resolution	32,768 x 32,768
Theory clicks	Unlimited
Connect type	USB2.0 Full Speed
Voltage	DC+5V +/- 5 %
Windows 10/8/7, Android	Multiple touch supported
Windows XP, Linux, Mac OS X, Chrome	Single touch supported

### ELECTRICAL

Power requirements	AC 100V - 240V, 50/60Hz
Power consumption without OPS	Maximum brightness: 300 W 50% brightness: 180 W
Standby condition without OPS	< 0.5 W
Audio output power	2x15 W/8 $\Omega$
OPS power	DC 18V/5A

### SOFTWARE

OS	Android 9.0
Pre-installed app	Whiteboard, Browser, File manager, Screen share, Office document view (incl. PDF), Media Player, Cloud storage, Android app store
Default functions	Welcome screen (Launcher), Setting, Source setting, Annotation tool, Stopwatch, Clock, Calculator, Eye-protection, Spotlight, Screen capture, Calendar, Vote, Screen Recorder, Split Screen, Picture in Picture

# A6500

## MAIN SPECIFICATIONS

### WIFI

Operating frequency	2.4 GHz/5 GHz
Wi-Fi standard	802.11a/b/g/h/ac

### OPS SPECIFICATIONS

Main spec (OPS)	Chipset: SOC LAN interface (Wired): 10BASE-T/100BASE-TX/1000BASE-T LAN interface (Wireless): 802.11 a/b/g/h/ax Network authentication (Wireless LAN): According to setting on system OS Encryption (Wireless LAN): According to setting on system OS Interface (Output): HDMI Interface (others): USB 3.0 Type A x 2, USB 2.0 Type A x 2, USB Type C x 1, 3.5 mm microphone jack, 3.5 mm headphone jack Bluetooth: embedded Power Source: DC +12 to 19V
Capture box	Not included
Installation	Insert into OPS slot
Product size: W x D x H (mm)	200 x 119 x 30
Product weight (kg)	1
Environmental condition	Operating temperature limits: -10 - 50°C Operating humidity limits: 20 - 80% Storage temperature limits: -10 - 50°C Storage humidity limits: 15 - 80%


### ECOLOGY


Operating temperature (°C)	0 - 32
Operating humidity (%)	20 - 80
Altitude limitation: sea level (m)	Lower than 3,500
Maximum daily operation hours (exclude stand-by time)	18 hours/day (24 hours) Maximum daily operating hours are 18hrs/day. Do not use the machine continuously/intermittently for more than 18 hours per day. Failure to do so could result in malfunction.
Storage temperature	-10°C ~ +50°C
Storage humidity	15% ~ 80% RH Non-Condensing
Shelf life	14 months after production

### ACCESSORIES

- Touch pen x2
- Read this first sheet
- Quick guide sheet
- Batteries AAAx2
- Remote control
- Power cord
- USB type C cable (2m)
- HDMI 2.0 cable (3m)
- Plastic clamp (2pcs)

Ricoh Italia Srl  
Viale Martesana, 12  
20090 Vimodrone (MI)  
Italy

 02.91987100

 [www.ricoh.it](http://www.ricoh.it)